EMAX

torcUP

STRENGTH UNDER PRESSURE

EMAX HYDRAULIC PUMPS

EMAX

ELECTRIC HYDRAULIC TORQUE WRENCH PUMP

THREE-STAGE PERFORMANCE

GET MAXIMUM PERFORMANCE FROM A MINIMUM WEIGHT HYDRAULIC TORQUE WRENCH PUMP. SET THE PRESSURE AND ACHIEVE THE TORQUE EVERY CYCLE.

TECHNICAL DATA	EMAX-115V / EMAX-230V
Reservoir Capacity (gal/litre)	2.2 / 8.4
Valve Style	Auto Retract
Motor Specification	2.2 hp / 1.6 kW
Weight (lbs/kg)	62 / 28

MAX OIL FLOW	EMAX-115V / EMAX-230V	
Stage 1 (1000psi / 70bar)	610 cu.in/min	10.0 l /min
Stage 2 (3900psi / 270bar)	145 cu.in/min	2.4 l /min
Stage 3 (10,000psi / 700bar)	65 cu.in/min	1.1 l /min

DIMENSIONS	EMAX-115V / EMAX-230V
Length (in/mm)	16.5 / 419
Width (in/mm)	15.0 / 381
Height (in/mm)	16.0 / 406

RESERVOIR DIMENSIONS	EMAX-115V / EMAX-230V
Length (in/mm)	12.6 / 320
Width (in/mm)	9.4 / 239
Height (in/mm)	5.1 / 130

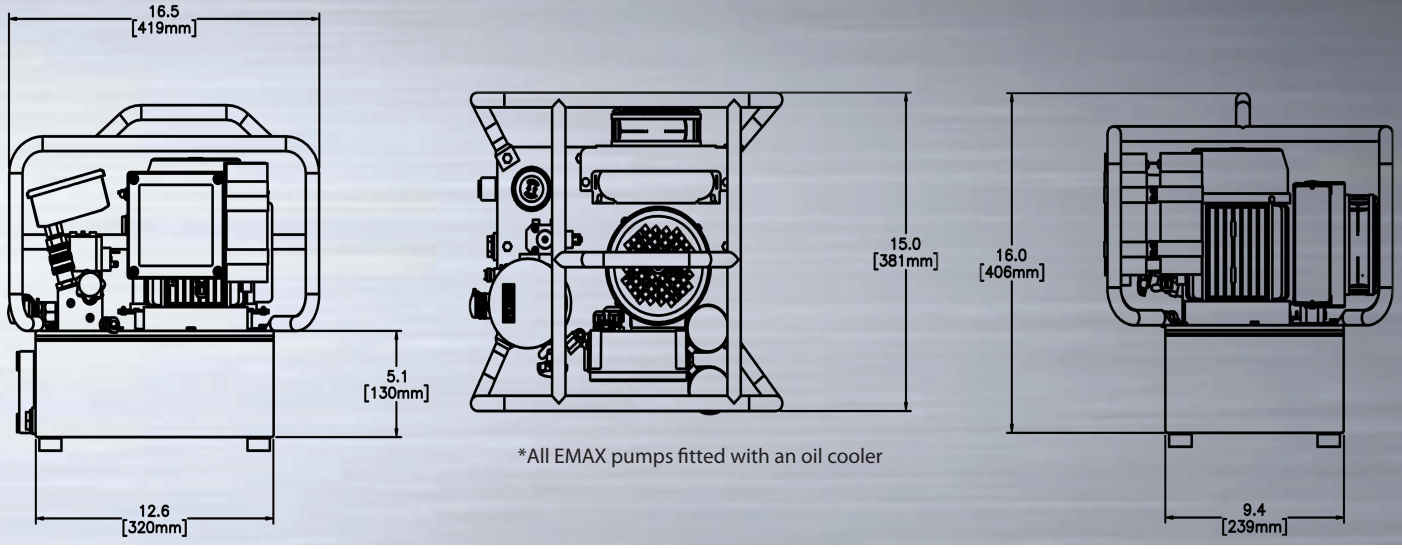

*All EMAX pumps fitted with an oil cooler

TWIN LINE
HYDRAULIC HOSE

MULTI- PORT
MANIFOLD

* HYDRAULIC HOSE AND MULTI- PORT MANIFOLD SOLD SEPARATELY

TorcUP Inc. 1025 Conroy Place Easton, PA. 18040 USA 1-888-TorcUP-1 +1 610-250-5800